

MONUMENT RECORD

Corner ID: **Per_Q23**

Quarter Corner

Sections 34 & 35- T08N-R01W, 2nd P.M.

Perry Township, Monroe County, Indiana

Section 34

T08N-R01W

Perry


Section 35

T08N-R01W

Perry

MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)
5/8" Rebar with yellow mangled Deckard cap 0.2' above grade.

MONUMENT LOCATION SKETCH:

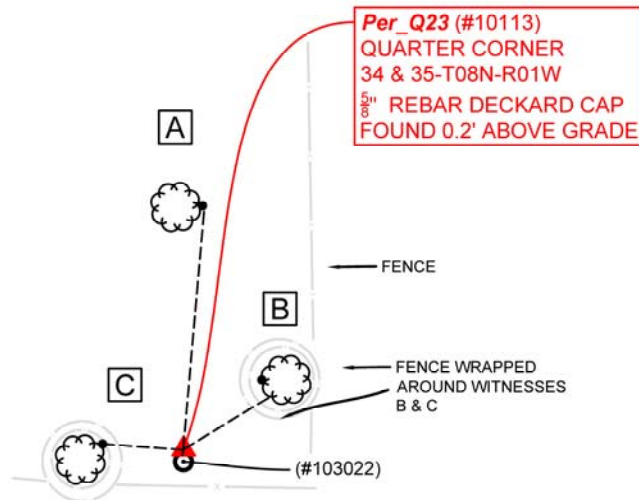

WITNESS MONUMENT TIES

All ties to new Bearing Trees (BTs) are a mag nail set in a 1-1/2" plastic washer stamped "SURVEY MARKER - DO NOT REMOVE" and hack mark at the root crown (less than 12" above ground) perpendicular to the center of the tree, unless otherwise noted. BT diameters are noted as dbh and are measured approximately 4.5' above ground. Bearings are measured from the monument to the center of the BT, distances are measured from the monument to the mag nail.

ID	BEARING	DISTANCE	DESCRIPTION
Witness A	N 5d E	24.8'	Set mag nail and washer in hack 0.3' above grade on the east side of 8" hackberry tree.
Witness B	N 58d E	10.3'	Found magnetic signals in 18" slippery elm tree with barbwire wrapped around it and a white "No Trespassing" sign on west side as per Witness D on 2009 monument record. Set mag nail and washer in hack 0.2' above grade on west side.
Witness C	N 86d W	8.4'	Found magnetic signals in 20" black walnut tree with barbwire wrapped around it as per on 2009 monument record. Set mag nail and washer in hack 0.8' above grade on east side.

MONUMENT ACCESSORIES

Other survey grade monuments that were located in the vicinity and their relation to the monument. Geodetic coordinates in this table are provided in the format Easting, Northing.

(#103022)	S 6d9'6" W	0.60'	Found 1/2" rebar 2' above grade as per 2009 monument record.
-----------	------------	-------	--



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **Per_Q23**

Quarter Corner

Sections 34 & 35- T08N-R01W, 2nd P.M.
Perry Township, Monroe County, Indiana

PHOTO IDENTIFIED: Photo Date: 08/19/2022



Photo Orientation & Description: Per_Q23 from above.



Photo Orientation & Description: Looking east at Per_Q23

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND: Include, search area or areas, search procedure, etc.

Date of Field work/Search: 08/19/2022 By: JG & HJ Monument Found: Rebar with Deckard cap BTs or Reference Objects Found: Found Witnesses B, C & D from 2009 monument record Project #: Perry Preservation Field Book: 54/77 Equipment: The basis of bearings is Grid North System NAD83(2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b_conus.db3, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Coordinate data was collected with a Javad Triumph LS Network Rover. Coordinates are available upon request. Distances to witness ties were collected with a 100' measuring tape. Bearings to witness ties were collected with the internal magnetic compass of the Javad Triumph LS and were automatically adjusted to grid north and are approximately shown hereon for reference. Priority should be given to provided distances over bearings. Notes: All witness photos on file in the Monroe County Surveyors Office.

OTHER EVIDENCE: Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.

Monument is located at the southeast corner of 2570 Rayletown Road. There is a cattle gate close to the house. After that point, one can drive south and east to a point where the tall grass becomes woods. The MCSO was able to drive to a point forty feet west of the rebar before traversing on foot the rest of the way.

MONUMENT PRESERVATION: Describe work done to preserve existing monument.

Geodetic controls were captured for the monument and Witness (#103022). A new sign was set on a T-post 3.5' above grade and 5" east of monument. Property owners were made aware of monument's existence.

THEORY OF LOCATION: Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.

The rebar was previously witnessed by the Monroe County Surveyor, Kevin Enright, on April 15, 2009 and accepted by the Monroe County Surveyor Review Board on May 12, 2009. The 2009 Monument Record accepted the rebar per a boundary survey by Eric L. Deckard, Jane Rezvan (2007), recorded as Instrument Number 2007021909.IN. Another reference on file: Eric L. Deckard survey, McIntosh Boundary Survey (2022), on file at the Recorder's Office as 2022010562.IN. Historic research has not yet been performed to prove the validity of this monument.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 2 of 3

MONUMENT RECORD

Corner ID: **Per_Q23**

Quarter Corner

Sections 34 & 35- T08N-R01W, 2nd P.M.
Perry Township, Monroe County, Indiana

Section 34

T08N-R01W

Perry

Section 35

T08N-R01W

Perry

CERTIFICATION:



Date: 11/22/2022

Trohn Enright-Randolph

Monroe County Surveyor



Date: 11/22/2022

Donna Barbrick

Monroe County Surveyor Review
Board Secretary



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 3 of 3

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 35

Township: 8 North


Range: 1 West

Corner ID: Per Q-23

Monument Description & Remarks: 5/8" Rebar with cap, "DECKARD 2999012". Survey Sign 1.5ft above ground at pt. B

References On File: Eric L. Deckard survey, Jane Rezvan (2007), on file in Recorder Office cabinet S, envelope 395

RECOVERY TIE DRAWING
Field Book 42 Page No. 42

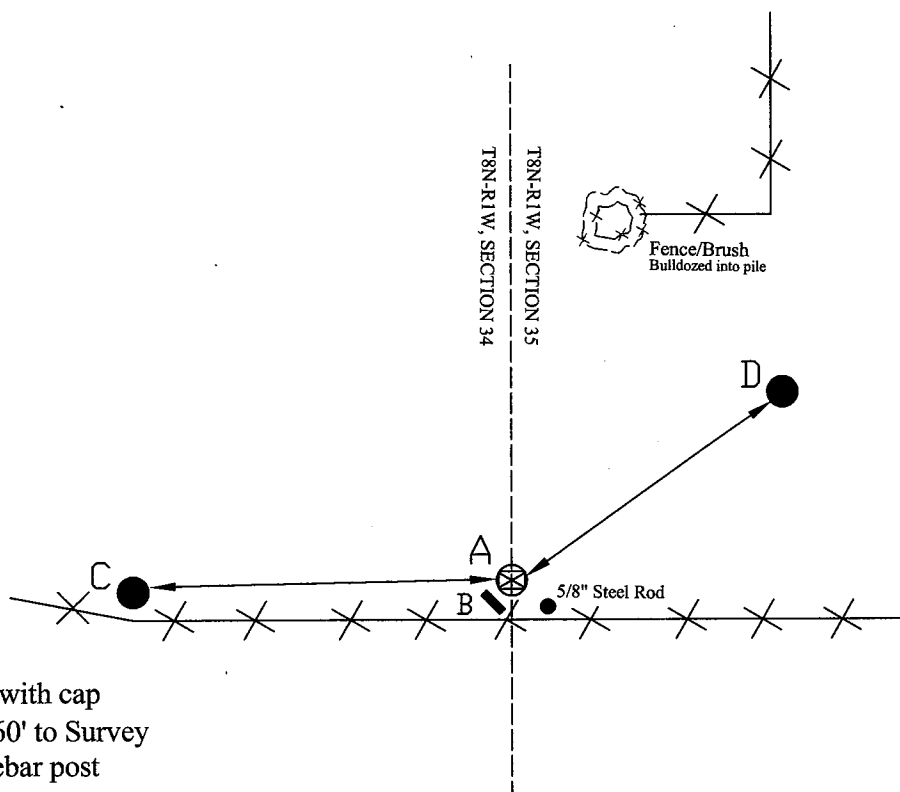

- A - 5/8" Rebar with cap
- B - S 05° W 0.60' to Survey Sign on 1/2" Rebar post
- C - N 86° W 9.69' to MAG nail in 19" Black Walnut
- D - N 55° E 10.21' to MAG nail in 16" Slippery Elm

Not To Scale
Compass Bearing Magnetic North



I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code; and the above data is given under my hand and seal this 15th day of April, 2009.

Kevin P. Enright

Administered by the Monroe County Surveyor Review Board

Date: 5-12-2009

